


Technical data N10S/N15S

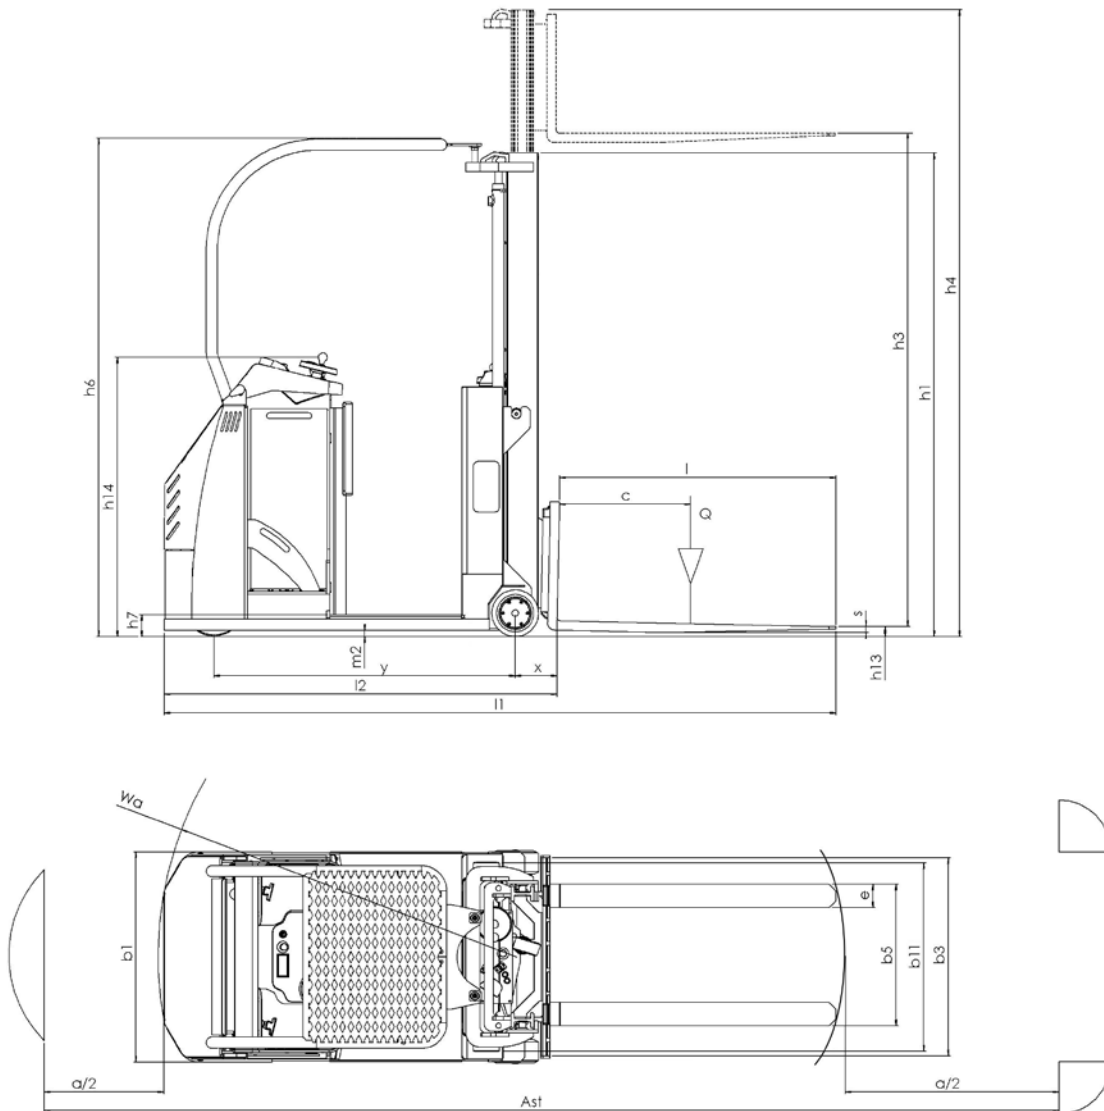

KRULL GmbH
 Gabelstapler · Lagertechnik · Kompressoren · Drucklufttechnik
Gabelstapler • Kompressoren
 Rüschefeld 25 · 33397 Rietberg · Tel: 05244/939394 · www.krull-gmbh.de

DOOSAN Gabelstapler
 Lagertechnik

MARK Kompressoren
 Drucklufttechnik
 TECHNOLOGIE DIE ÜBERZEUGT

Characteristics	1.1	Manufacturer		Actil	Actil
	1.2	Model designation		N10	N15
	1.3	Power unit		Battery	Battery
	1.4	Operation		Order picker	Order picker
	1.5	Load capacity	Q (t)	1,0	1,5
	1.6	Load center	c (mm)	500	500
	1.8	Axle centre to fork face	x (mm)	210	220
	1.9	Wheelbase	y (mm)	1317	1460
Weights	2.1	Service weight	(kg)	2128	2432
	2.2	Axle load with load, drive side/load side	(kg)	528/2600	532/3400
	2.3	Axle load without load, drive side/load side	(kg)	1068/1060	1372/1060
Wheels/tyres	3.1	Tyres		Polyurethane	Polyurethane
	3.2	Tyre size, drive side		Ø255x125	Ø255x125
	3.3	Tyre size, load side		2xØ200x100	2xØ200x100
	3.5	Wheels, number drive side/load side (x=driven wheels)		1x/2	1x/2
	3.7	Track width, load side	b11 (mm)	810	810
Dimensions	4.2	Height of mast, lowered	h1 (mm)	2485	2485
	4.4	Lift	h3 (mm)	3730	3730
	4.5	Height of mast, extended	h4 (mm)	4350	4350
	4.7	Height of overhead guard	h6 (mm)	2290	2290
	4.8	Stand height	h7 (mm)	90	90
	4.9	Height of steering wheel in operating position, min/max	h14 (mm)	1150/1150	1150/1150
	4.15	Fork height, lowered	h13 (mm)	70	70
	4.19	Overall length	l1 (mm)	2918	3063
	4.20	Length to fork face	l2 (mm)	1718	1863
	4.21	Overall width	b1 (mm)	900	900
	4.22	Fork dimensions	s/e/l (mm)	40/100/1200	40/100/1200
	4.23	Fork carriage to ISO 2328, class/type A, B		A	A
	4.24	Fork-carriage width	b3 (mm)	870	870
	4.25	Width across forks	b5 (mm)	315/515/770	315/515/770
	4.32	Ground clearance, centre of wheelbase min/max	m2 (mm)	20/20	20/20
	4.34	Aisle width with pallet 800x1200 crossways/lengthways	Ast (mm)	3175/3213	3317/3355
	4.35	Turning radius	Wa (mm)	1548	1679,86577
4.39	Aisle width without pallet	Ast (mm)	3175	3317	
Performance	5.1	Travel speed, with/without load	(km/h)	12/12	12/12
	5.2	Lifting speed, with/without load	(m/s)	0,14/0,23	0,14/0,23
	5.3	Lowering speed, with/without load	(m/s)	0,25/0,30	0,25/0,30
	5.7	Gradeability, laden/unladen	(%)	7/7	7/7
	5.10	Service brake		Electric	Electric
Drive	6.1	Drive motor S2 60 minute rating	(kW)	3,0	3
	6.2	Lift motor rating at S3 15%	(kW)	3,0	3
	6.4	Battery voltage/rated capacity (5h)	(V/Ah)	24/775	24/775
	6.5	Battery weight (±5%)	(kg)	610	610
	Others	8.1	Type of drive control		Electronic
8.4		Noise level at operator's ear	(dB(A))	<70	<70

Alternative mast types, tyres, equipment, etc. could result in different values. See mast and equipment list.
All technical data according to VDI. 2198.

Performance and dimensions are displayed with reservation for tolerance.