


Articulating Booms

1	Manufacturer		HANGCHA GROUP CO.,LTD.	
2	Model		GTHZ120	GTHZ170
3	Working height	m	11.95	16.75
4	Platform height	m	9.95	14.75
5	Horizontal height	m	7.00	9.3
6	Up and over height	m	4.77	7.1
7	Length	m	5.48	6.92
8	Length (storage)	m	3.74	5.4
9	Wheel base	m	1.65	2
10	Width	m	1.22	1.75
11	Height	m	1.99	2.09
12	Height (storage)	m	2.16	2.09
13	Basket size	m	1.20x0.77	1.20x0.77
14	Turning radius inside	m	1.55	2.0
15	Turning radius outside	m	3.25	4.30
16	Turning radius outside (basket)	m	3.34	5.6
17	Ground Clearance	m	0.10	0.15
18	Capacity	kg	200	200
19	Jib movement		±70°	±70°
20	Basket roration		140°	140°
21	Turret rotation		350°	355°
22	Drive speed	km/h	6.00	4.5
23	Working speed	km/h	0.60	0.60
24	Gradeability	%	25%	22%
25	Maxi slope acceptable	%	3° or 5%	3° or 5%
26	Tires	m	0.60x0.19	0.60x0.19
27	Wheel steer		2	2
28	Wheel drive		2	2
29	Batteries (C5)	V/Ah	330,2x24	330,2x24
30	Weight	kg	6550	7030

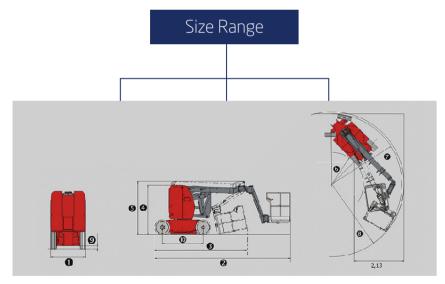





GTHZ120 GTHZ170







Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com








from those in brochures.





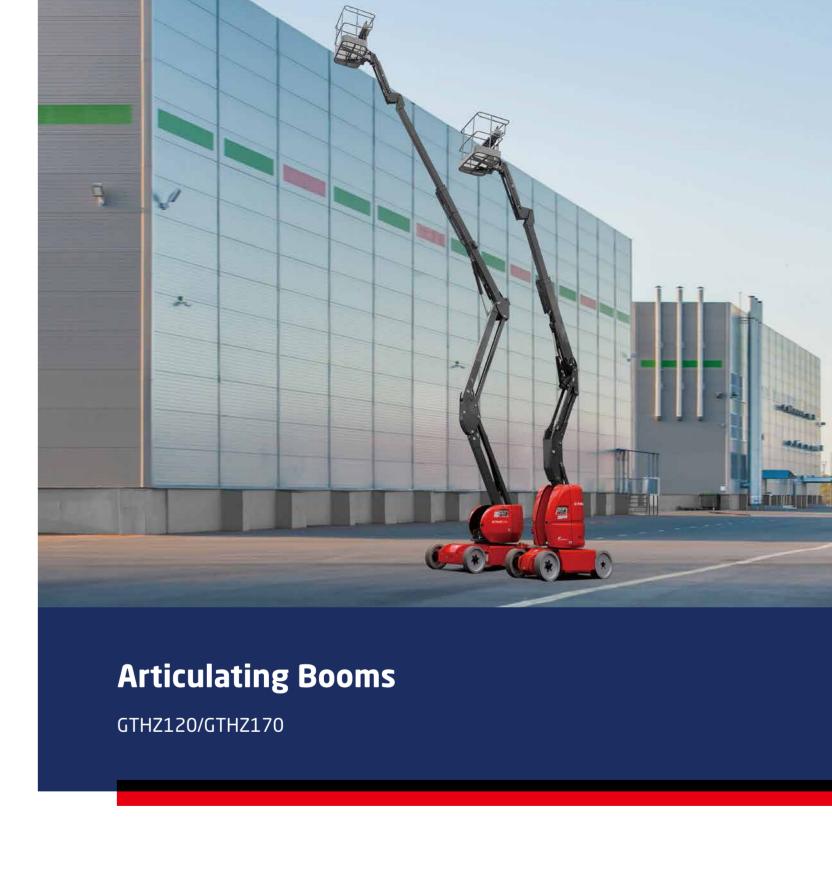





Articulating Booms



Standard specification

- / Electrical battery traction
- / Negative brakes
- / Lifting brakests
- / Hour meter
- / Warning buzzer in the basket
- / 220V predisposal
- / Voltage indicator
- / Safety manual pump
- / Bus CAN technology / Diagnostic help integrated
- / Dual electrical motors
- / No marking tires / Anti-roll system
- / Integrated charger

Options

- / Working lights
- / Flashing light(all motion alarm)
- / Buzzer
- / Air predisposal
- / Electrical plug 220V
- / Over-load sensor system

Easy/ Efficiency/ **Economy**











